


# Cage Clamps



Hand Lever  
2" - 60"  
(125A)

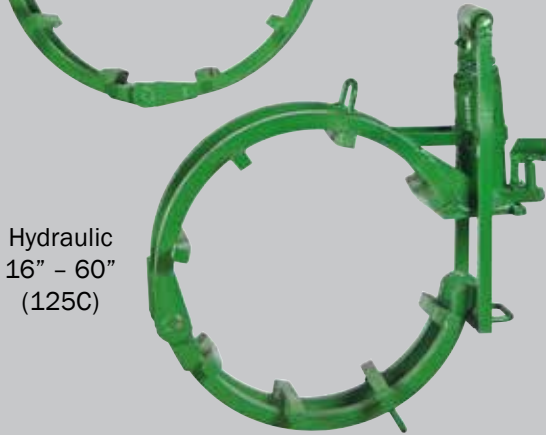

Hydraulic  
16" - 60"  
(125C)



Ratchet  
6" - 60"  
(125E)

## OVERVIEW

**Hand Lever:** Simple, quick and easy to use! Industry standard for over 50 years.

**Hydraulic:** Pulls down tight with a hydraulic jack for effortless pipe alignment. Hydraulic closure mechanism also enables rapid release after welding.

**Ratchet:** When you need extra force the precision cut Acme thread design delivers both strength and ease of operation. Standard 1" ratchet wrench fits all sizes.

## FEATURES AND BENEFITS

- Available for pipe sizes 2" - 60"
- Wide selection of sizes, closure mechanisms, and cross-bars to meet almost any alignment requirement
- Available with stainless steel contact points
- Tack design features flat crossbars
- No tack design features arched crossbars for full 360-degree welding
- Custom sizes are available for oversize, odd or Powercrete epoxy pipe

## ACCESSORIES

### JACK SCREW WEDGES (480)

- Available in 2 sizes for clamps 16"-28" and 30"-48"
- Will work with all major manufacturer's cage clamps
- Hold fittings in place when using an external clamp
- Precision machined for accuracy
- Heat treated for durability



### HI-LO WEDGES (460)

- Available in 2 sizes for clamps 16"-28" and 30"-48"
- 1" and 1 1/4" to fit all major manufacturer's cage clamps
- Precision machined for accuracy
- Heat treated for durability
- Simple solution to hi-lo



## ESTIMATED SHIPPING WEIGHT

Model No.	Description	Weight	
125A	Cage Clamp - Hand - Tack	14-377 lbs.	6.4-171 kg.
125B	Cage Clamp - Hand - No Tack	14-377 lbs.	6.4-171 kg.
125C	Cage Clamp - Hydraulic - Tack	125-445 lbs.	56.7-201.8 kg.
125D	Cage Clamp - Hydraulic - No Tack	125-445 lbs.	56.7-201.8 kg.
125E	Cage Clamp - Ratchet - Tack	40-372 lbs.	18.2-168.7 kg.
125F	Cage Clamp - Ratchet - No Tack	40-372 lbs.	18.2-168.7 kg.
125J	Ratchet Handle	5 lbs.	2.27 kg.

Follow us on social media and watch product videos on our YouTube channel **Sawyer Mfg**

918-834-2550



sawyermfg.com